

Shielded Expansion Joint +/-25mm




Design Features

- Female Threaded BSP
- Stainless Steel convoluted bellows with +/- 25mm of movement
- Carbon Steel end fittings
- Internal flow sleeve
- Suitable for temperatures of $-10^{\circ}\text{C}/+300^{\circ}\text{C}$
- Pressure rated to PN16
- Anti Twist Protection
- Pre Loaded with Mounting Ring

Product Description

Pipe Expansion Joints allow and absorb axial movement while maintain the pipe integrity. These prevent damage from results of line movement. Suitable for LTHW.

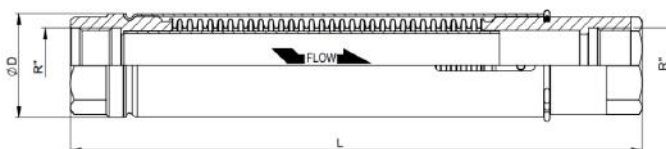

Part Number	Pipe Size	Axel Spring Rate N/mm	Length (mm)	Axial Movement (mm)
NS-EJ-25-015	15NB / 21.3 OD	18	260	+/-25MM
NS-EJ-25-020	20NB / 26.9 OD	18	260	+/-25MM
NS-EJ-25-025	25NB / 33.7 OD	16	260	+/-25MM
NS-EJ-25-032	32NB / 42.4 OD	19	260	+/-25MM
NS-EJ-25-040	40NB / 48.3OD	22	260	+/-25MM
NS-EJ-25-050	50NB / 60.3 OD	22	260	+/-25MM