

Stainless Steel Flexible Hose




Product Description

316 Stainless Steel Convuluted Hose with 304 Stainless Steel braided outer.

Offered in BSPT male threaded ends or Flanged PN16 ends on larger sizes

Design Features

- Stainless Steel Construction
- Manufactured to ISO 10380:2012
- Can be used to reduce vibration & noise from plant units
- Can be used to allow lateral movement of 35mm +/-
- For use on LTHW, CHW, Steam & Condensate
- Temperature range -200°C to +600°C

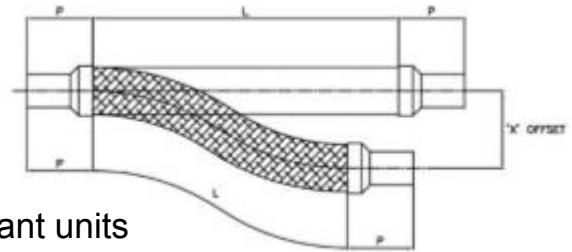

Pipe DN Size (mm)	Pipe DN Size (Inch)	Part Number	End Fittings	Overall Length (mm)	Lateral Movement (mm)
15	1/2"	NS-FHSS-BSPT-015	BSPT	460	+/- 35
20	3/4"	NS-FHSS-BSPT-020	BSPT	490	+/- 35
25	1"	NS-FHSS-BSPT-025	BSPT	510	+/- 35
35	1 1/4"	NS-FHSS-BSPT-035	BSPT	585	+/- 35
40	1 1/2"	NS-FHSS-BSPT-040	BSPT	620	+/- 35
50	2"	NS-FHSS-BSPT-050	BSPT	635	+/- 35
65	2 1/2"	NS-FHSS-BSPT-065	BSPT	695	+/- 35
65	2 1/2"	NS-FHSS-PN16-065	PN16	700	+/- 35
80	3"	NS-FHSS-PN16-080	PN16	800	+/- 35