

PAPDi - Pipe Anchor with Thermal Break (Copper)




Product Description

Designed to stop axial, lateral and vertical movement of pipe. These can be floor, ceiling or wall mounted. Designed with height adjustable to aid installation,

Design Features

- High Performance Coatings EP&ZN
- Easy height adjustment with "NS Socket Technology"
- Supplied with EP Coated Clips to avoid issues with dissimilar metals
- Reduced heat loss with Thermal Break (Included)
- For Copper or Stainless pipes 54 - 159mm OD
- Recommended that Pipe Stops are used, please refer to install instructions

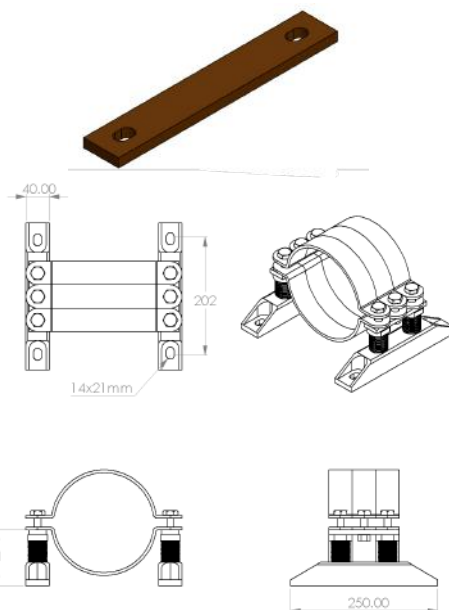

Part Number	Clip to fit pipe OD (mm)	Max Temp	Load Axial	Load Vertical	Load Lateral
NS-PAPDi-CU-54mm	54	200	42kN	42kN	42kN
NS-PAPDi-CU-67mm	67	200	42kN	42kN	42kN
NS-PAPDi-CU-76mm	76	200	42kN	42kN	42kN
NS-PAPDi-CU-89mm	89	200	42kN	42kN	42kN
NS-PAPDi-CU-108mm	108	200	42kN	42kN	42kN
NS-PAPDi-CU-139mm	139	200	42kN	42kN	42kN
NS-PAPDi-CU-159mm	159	200	42kN	42kN	42kN