


Pair of Skid Supports M16

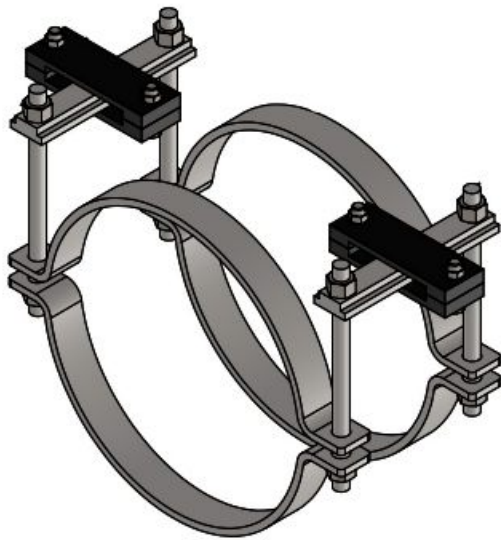

Product Description





Designed to allow free axial and lateral movement of pipe while restricting vertical lifting movement.

These are purposely designed for the challenging application where the pipe is moving in multiple directions like offsets or pipe loops.

These can be ceiling mounted and are suitable for connections to Unistrut.

Design Features

- 4 Fixings Holes with M12 Bolts
- Double M16 Connections to pipe clips
- Electro Painted, BZP or Zinc Nickel Finish
- Low Friction Slide Insert
- Not supplied with Clips or Rods
- Movement is +/- 25mm in all directions

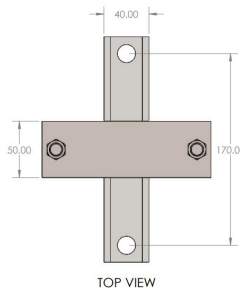

Part Number	Connection	Bi-lateral movem	Max Temperature	Load Vertical (Hung)	Load Vertical (Sat)
NS-SKDP-M16	4x M16	+/-25mm	200	20kN	20kN
NS-SKDP-XM-M16	4x M16	+/-50mm	200	12kN	12kN