

SUMO DS Spring Mount Data Sheet





Product Description

A range of steel spring mounts offering the optimum performance for low frequency vibration isolation. Two mounting sockets for easier fixing.
Comprehensive load ranges and different fixing requirements.

Design Features

- All steel parts are Zinc Nickel finish, Electro Painted or powder coated.
- Helical Steel Springs, colour coded and manufactured in the UK to BS1726 with nominal deflection up to 50mm.
- Includes bespoke 10mm dampening arrangement including rubber block.
- 50% Overload capacity
- Pre-compression of spring possible before installation and can be delivered pre-set for ease of installation
- Adjustable mounting socket for easy on site adjustments and use with I-Beams

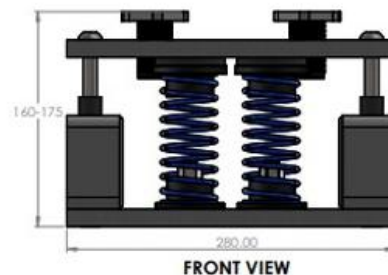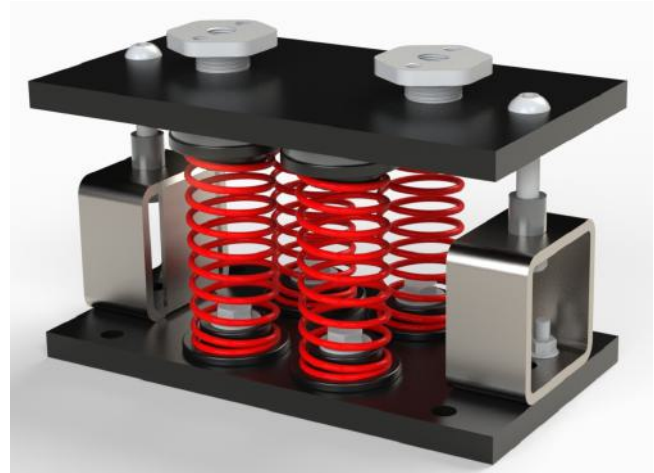

Part number	Weight (Kg)	Static Deflection (mm)	Spring Colour
SUMO-DS-100-50	100	50	YELLOW
SUMO-DS-200-50	200	50	GREEN
SUMO-DS-300-50	300	50	ORANGE
SUMO-DS-400-50	400	50	RED
SUMO-DS-500-50	500	50	BROWN
SUMO-DS-600-50	600	50	BLUE
SUMO-DS-800-50	800	50	WHITE
SUMO-DS-1000-50	1000	50	BLACK
SUMO-DS-1200-50	1200	50	PINK
SUMO-DS-1600-50	1600	50	PURPLE