

SUMO XL Spring Mount Data Sheet




Product Description

A wide range of steel spring mounts offering the optimum performance for low frequency vibration isolation.

Comprehensive load ranges and different fixing requirements offered.

Design Features

- All steel parts are Electro Painted, HDG or powder coated.
- Helical Steel Springs, colour coded and manufactured in the UK to BS1726 with nominal deflection up to 50mm
- Includes bespoke 10mm dampening arrangement including rubber block.
- 50% Overload capacity
- Pre-compression of spring possible before installation and can be delivered pre-set for ease of installation
- Adjustable mounting socket for easy on site adjustments

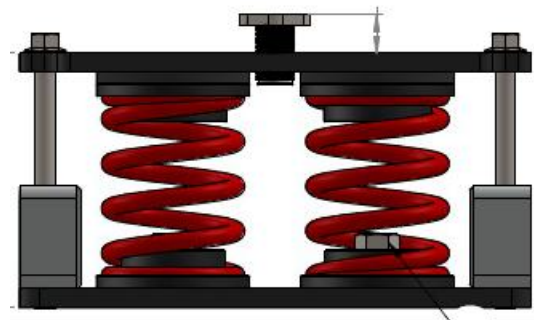

Part number	Weight (Kg)	Static Deflection (mm)	Spring Colour
SUMO-XL-1600-50	1600	50	BLUE
SUMO-XL-1800-50	1800	50	BLUE + RED
SUMO-XL-2000-50	2000	50	BLUE + WHITE
SUMO-XL-2200-50	2200	50	BLUE + PINK
SUMO-XL-2400-50	2400	50	RED
SUMO-XL-2600-50	2600	50	RED + RED
SUMO-XL-2800-50	2800	50	RED + WHITE
SUMO-XL-3000-50	3000	50	RED + PINK
SUMO-XL-3200-50	3200	50	RED + PURPLE